

HSJ

HIGH SPEED/CLASS J



Protect your wiring and power semiconductors with a single fuse.

The new High Speed J (HSJ) combines the low I^2t of a semiconductor fuse and the branch circuit performance of a Class J UL listed fuse. This fuse was designed for the starting characteristics of solid state motor controllers. The HSJ can provide branch circuit protection per NEC requirements, as well as very low I^2t for protection of power semiconductors such as Diodes, SCR's, GTO's and SSR's.

Features/Benefits

- **Optimized** over-load capability for withstanding elevated levels of current during electronic motor controller starts
- **Low I^2t** (low thermal energy)
- **Excellent Cycling Ability** for frequent starts/stops without nuisance opening

HIGHLIGHTS:

- Current-Limiting
- AC & DC Ratings
- Low I^2t
- Compact Size

APPLICATIONS:

- Branch Circuits
- Control Panels
- Electronic Motor Controllers
- Phase Controllers
- Drives
- Soft-Starters
- Solid State Relays

Ratings

- **AC:** 15-600A
600VAC, 200kA I.R.
300kA I.R. Self
Certified
- **DC:** 15-600A
500VDC, 100kA I.R.
L/R 10mS

Approvals

- HSJ (15 to 600A)**
- UL Listed to
Standard 248-8
- DC Listed to UL
248-8
- CSA Certified to
Standard C22.2
No. 248.8

HSJ

HIGH SPEED/CLASS J

Standard Fuse Ampere Ratings, Catalog Numbers


AMPERE RATING	CATALOG NUMBER	OUTLINE FIG.	AMPERE RATING	CATALOG NUMBER	OUTLINE FIG.
15	HSJ15	1	100	HSJ100	2
17.5	HSJ17.5	1	110	HSJ110	2
20	HSJ20	1	125	HSJ125	2
25	HSJ25	1	150	HSJ150	2
30	HSJ30	1	175	HSJ175	2
35	HSJ35	1	200	HSJ200	2
40	HSJ40	1	225	HSJ225	2
45	HSJ45	1	250	HSJ250	2
50	HSJ50	1	300	HSJ300	2
60	HSJ60	1	350	HSJ350	2
70	HSJ70	2	400	HSJ400	2
80	HSJ80	2	500	HSJ500	2
90	HSJ90	2	600	HSJ600	2

Recommended Fuse Blocks with Box Connectors for AMP-TRAP Class J Fuses

Fuse Ampere Rating	Catalog Number	
	1 Pole	3 Pole
0-30	US3J1I	US3J3I
31-60	US6J1I	US6J3I
61-100	61036J	61038J
101-200	621001J	62003J
201-400	64031J	64033J
401-600	6631J	6633J


Dimensions

Fig 1

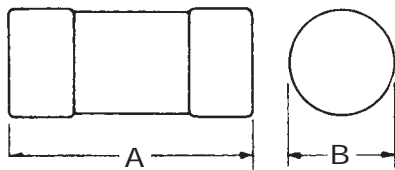

15-60A

Fig 2

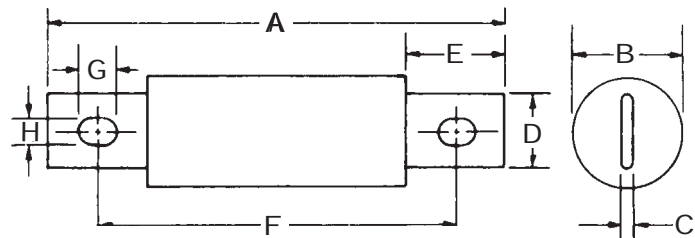

70-600A

Ampere Rating	A		B		C		D		E		F		G		H	
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm
15-30	2-1/4	57	13/16	21	-	-	-	-	-	-	-	-	-	-	-	-
31-60	2-3/8	60	1-1/16	27	-	-	-	-	-	-	-	-	-	-	-	-
61-100	4-4/8	117	1-1/8	29	1/8	3.2	3/4	19	1	25	3-5/8	92	3/8	10	9/32	7
101-200	5-3/4	146	1-5/8	41	3/16	4.8	1-1/8	29	1-3/8	35	4-3/8	111	3/8	10	9/32	7
201-400	7-1/8	181	2-1/8	54	1/4	6.3	1-5/8	41	1-7/8	48	5-1/4	133	17/32	13	13/32	10
401-600	8	203	2-1/2	64	3/8	9.5	2	51	2-1/8	54	6	152	11/16	18	17/32	13


HSJ

HIGH SPEED/CLASS J


I²t Data - 600Volts AC, 100kA

Ampere Rating (A)	Pre-Arc (A ² s x 10 ³)	Max Clearing I ² t @ 600V AC 100kA		Max Clearing I ² t @ 480V AC 100kA		Watts Loss at Rated Current
		1 Fuse (A ² s x 10 ³)	2 in Series (A ² s x 10 ³)	1 Fuse (A ² s x 10 ³)	2 in Series (A ² s x 10 ³)	
15	0.02	0.36	0.15	0.23	0.12	2.6
17.5	0.03	0.45	0.19	0.29	0.15	3.5
20	0.04	0.58	0.24	0.37	0.19	3.7
25	0.08	1.2	0.50	0.77	0.40	4
30	0.16	2	0.84	1.3	0.66	4.1
35	0.16	1.5	0.63	0.96	0.50	5.3
40	0.27	2.3	1.0	1.5	0.76	5.5
45	0.32	3.3	1.4	2.1	1.1	6
50	0.44	5.5	2.3	3.5	1.8	6.8
60	0.72	8.0	3.4	5.1	2.6	8.4
70	1.2	12	5.0	7.7	4.0	10
80	1.6	15	6.3	9.6	5.0	11
90	2.3	21	8.8	13	6.9	13
100	2.7	23	9.7	15	7.6	14
110	2.3	21	10	13.9	8	18
125	3.4	29	14	19	11	19
150	5.1	41	20	27	16	22
175	8.0	60	29	40	23	24
200	14	92	44	61	35	26
225	14	110	53	73	42	30
250	16	130	62	86	49	36
300	26	200	96	132	76	38
350	37	290	139	191	110	40
400	63	450	216	297	171	42
450	67	500	240	330	190	58
500	98	600	288	396	228	59
600	141	900	432	594	342	68


Clearing I²t vs Operating Voltage

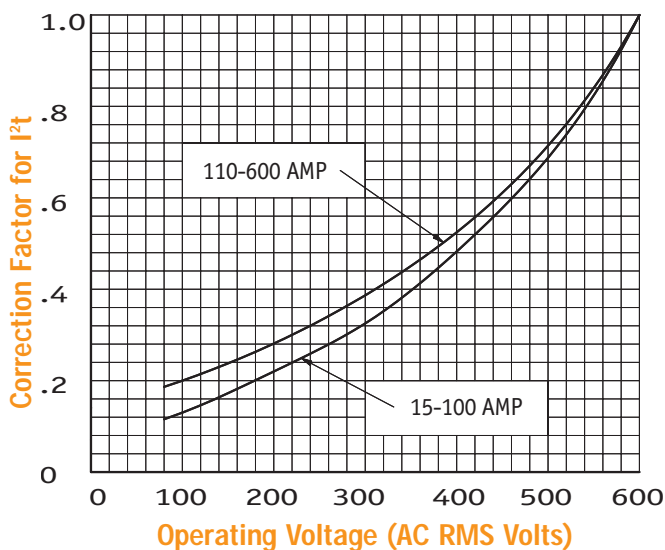

Watts Loss vs. % Rated Current

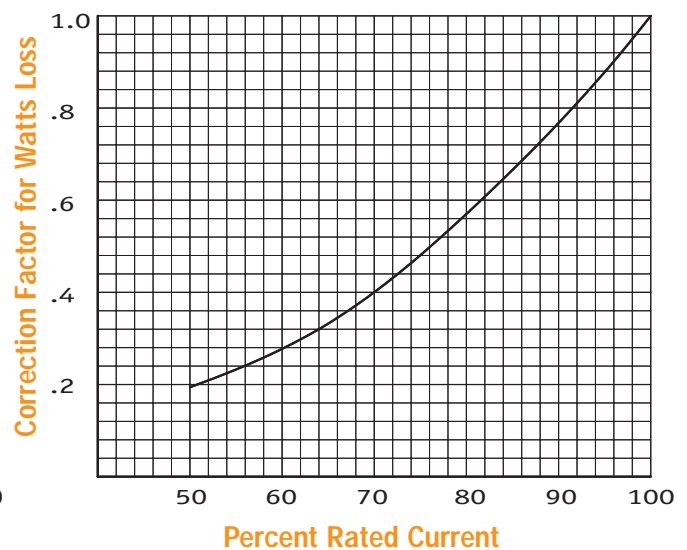

Peak Let-Through Data - HSJ15 to 600, 600Volts AC

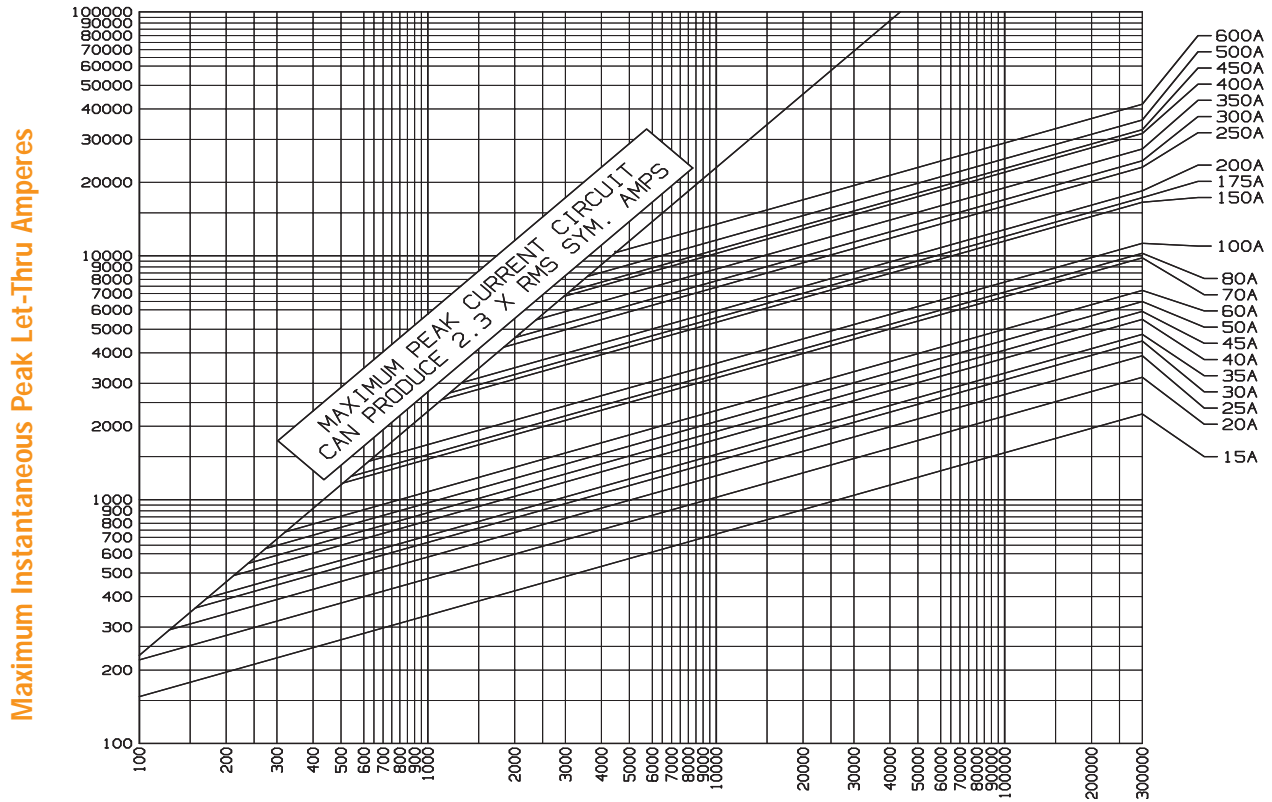


Available Current in RMS Symmetrical Amperes

Clearing I^2t at 500 VDC 100kA, L/R = 10ms

AMPERE RATING	CLEARING I^2t @ 500 VDC L/R = 10 ms ($A^2s \times 10^3$)
15	0.12
17.5	0.18
20	0.24
25	0.46
30	0.91
35	0.60
40	0.92
45	1.3
50	2.2
60	3.2
70	4.8
80	6.2
90	8.9
100	10
110	8.8
125	13
150	19
175	28
200	46
225	52
250	59
300	96
350	136
400	230
450	270
500	390
600	560


DC Voltage vs. Time Constant

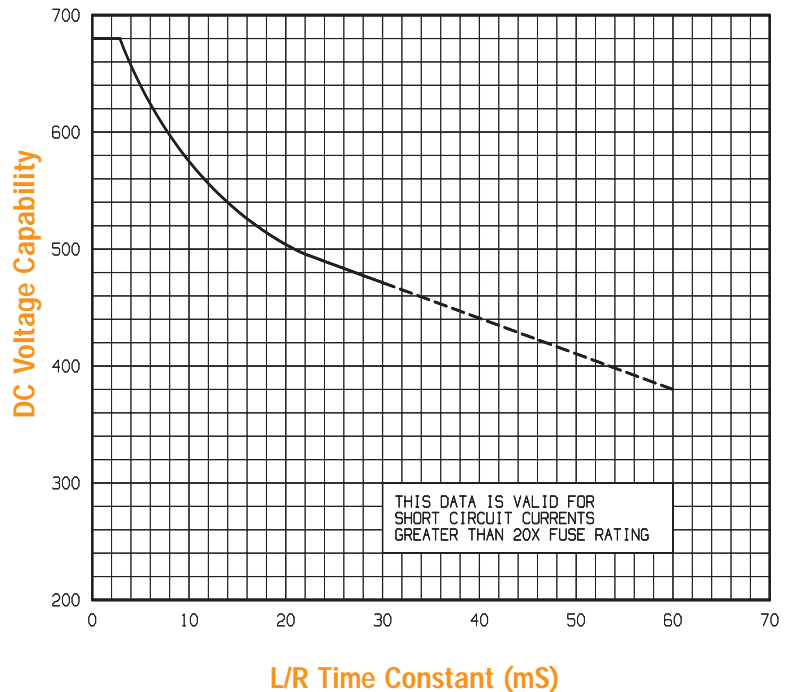


HSJ

HIGH SPEED/CLASS J

Melting Time - Current Data, HSJ15 to 600, 600Volts AC

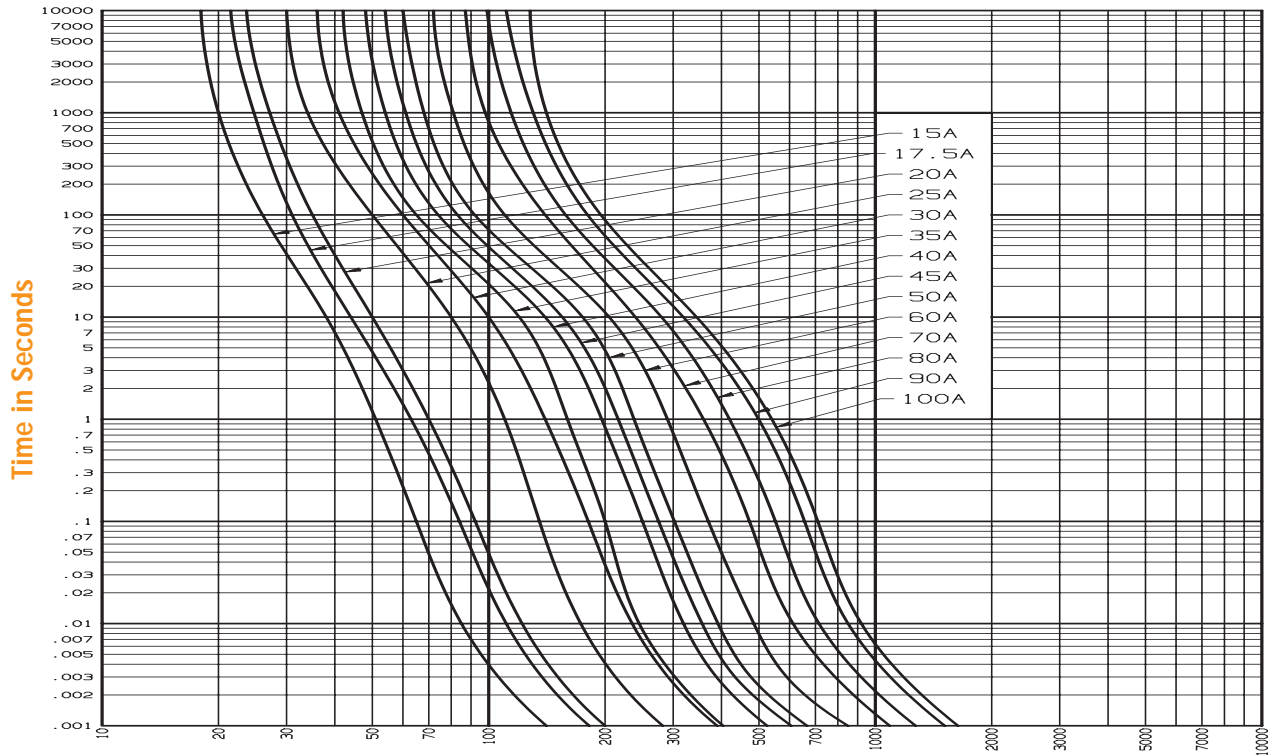

Available Current in RMS Symmetrical Amperes

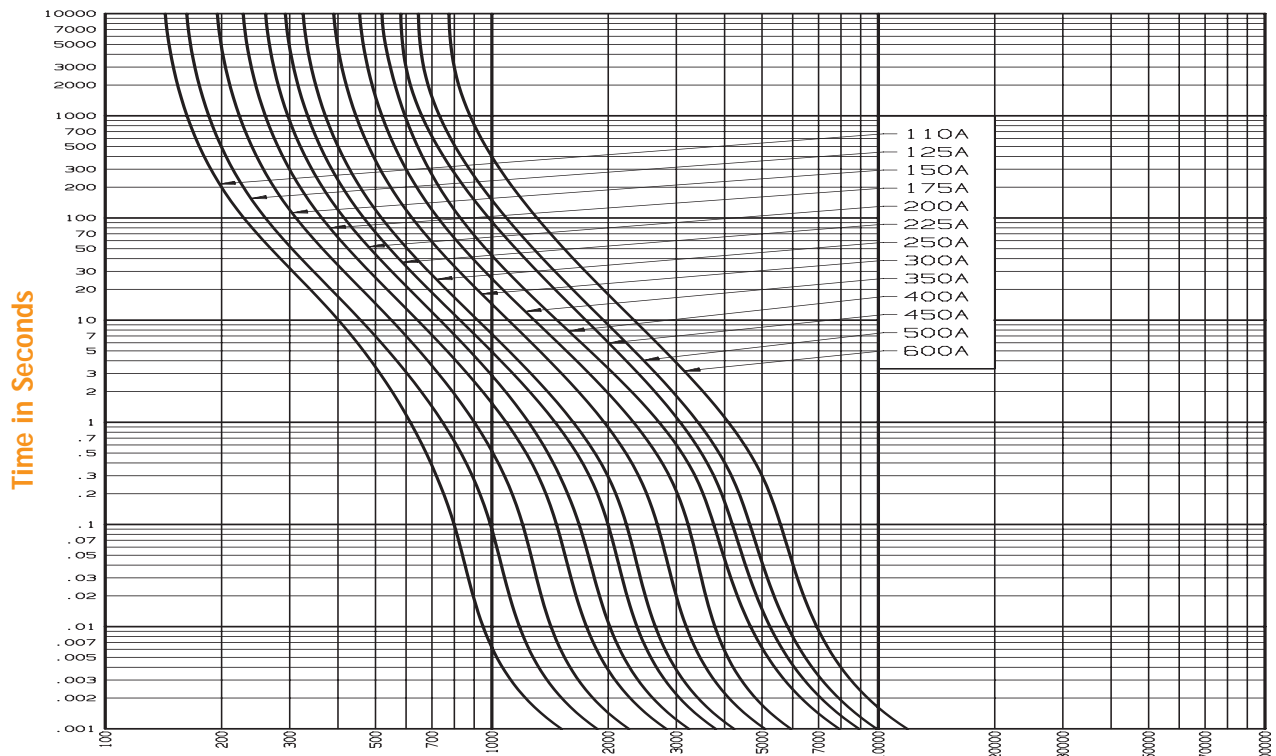

Available Current in RMS Symmetrical Amperes

North American Headquarters

Ferraz Shawmut
374 Merrimac Street
Newburyport, MA 01950-1998
Phone: 978-462-6662
Fax: 978-462-0181

E-mail: info@ferrazshawmut.com
ferrazshawmut.com

Global Headquarters

Ferraz Shawmut
1, rue Jean Novel
F-69100 Villeurbanne
France
Phone: +33 (0)4 72 22 66 11
Fax: +33 (0)4 72 22 67 13

Ferraz Shawmut Canada

88 Horner Avenue
Toronto, Ontario, Canada M8Z 5Y3
Phone: 416-252-9371
Toll-Free Phone: 800-267-8727
Fax: 416-252-6572
Toll-Free Fax: 800-387-3329



Your circuit protection resource.